

RIGID WATERTIGHT HUB

INSULATED THROAT - ZINC DIE CAST

Description:


Designed to connect threaded RMC or IMC conduit to a knockout or slip-fit enclosure opening where a watertight joint and protected conductor entry are required

- **Material:** Zinc Die-Cast
- **Type:** Threaded Watertight Hub
- **Conduit:** Rigid Steel Conduit/Intermediate Metal Conduit
- **Application:** RSC/IMC to enclosure knockout or slip-fit hole



VELKOR TIP | Seal and Ground

Seat the sealing surfaces squarely and tighten the locknut without damaging the enclosure wall

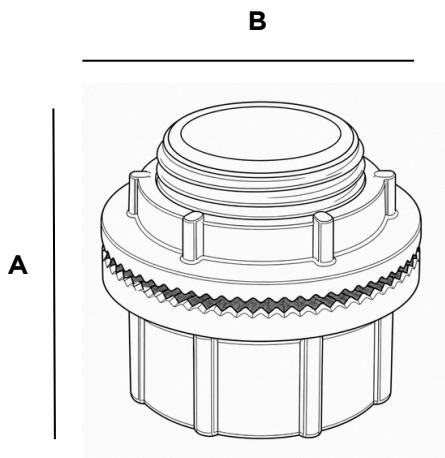

VELKOR ITEM NO.	SIZE	A (in.)	B (in.)
201	1/2"	1.31	1.54
202	3/4"	1.37	1.73
203	1"	1.59	2.04
204	1-1/4"	1.59	2.42
205	1-1/2"	1.59	2.79
206	2"	1.59	3.30
207	2-1/2"	2.44	3.70
208	3"	2.44	4.39
210	4"	2.44	5.50

A: Overall length B: Maximum outside diameter

VELKOR IMC/RSC CONDUIT ACCESSORIES

